


Fig. 1


Hveem Stability Results

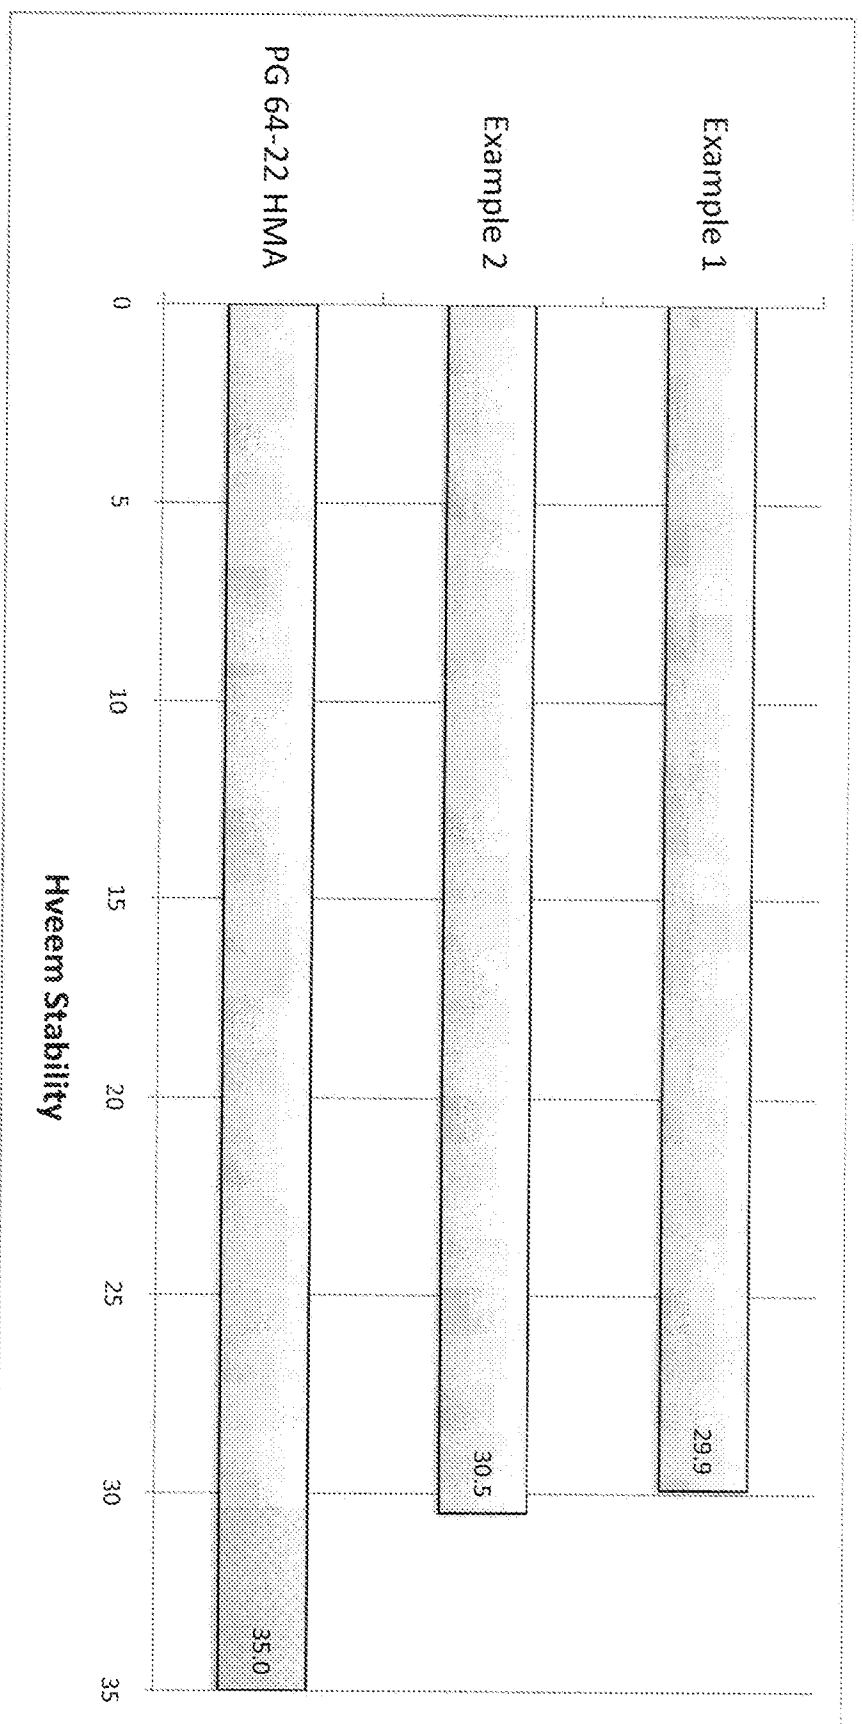

AASHTO T-246, at 60° C

Fig. 2


Fatigue Performance

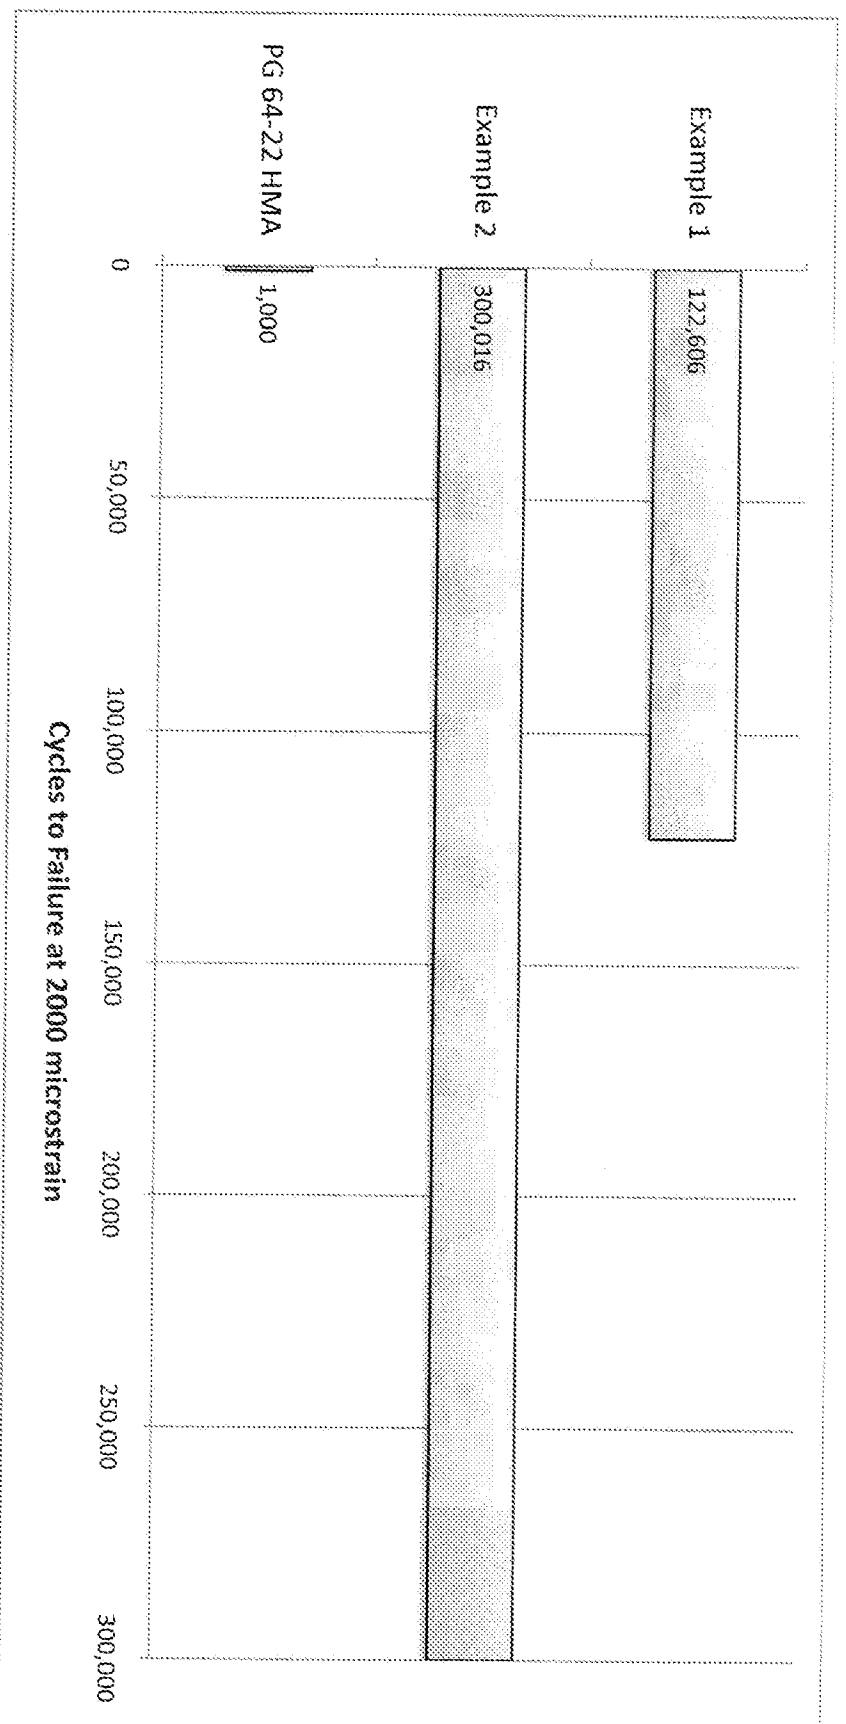

AASHTO TP-8, at test test temperature
Test temperature determined by project climate

Fig. 3

K, Permeability (cm/sec)

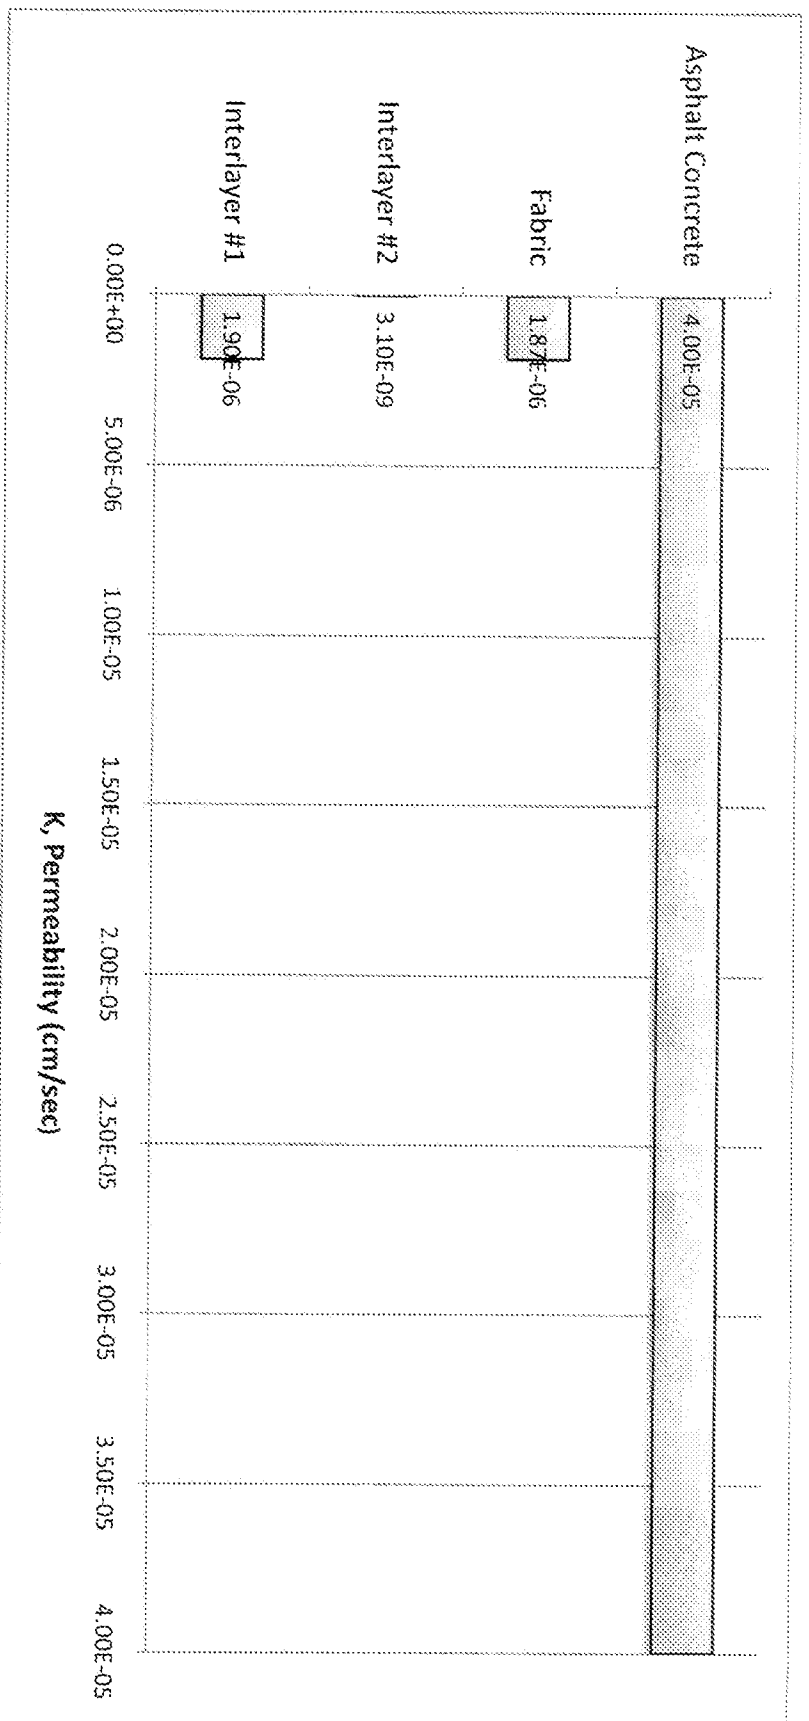

*ASTM D 5084, Standard Test Method for
Measurement of Saturated Porous Materials using a
Flexible Wall Permeameter (cm/sec)*